EFORCE
THE NEXT GENERATION OF EXTRICATION
SVT™
SMART VALVE TECHNOLOGY
SSS™
SMART SWAP SYSTEM
GENESIS RESCUE SYSTEMS
GENESIS
RESCUE SYSTEMS

## THE NEXT GENERATION OF UNTETHERED EXTRICATION

# EFORCE

**UNDER THE HOOD**

The next generation of untethered extrication. We started the redesign with the drive unit, adding a smaller more efficient brushless motor that makes even more power than eForce 2.0. Encased it within a state of the art housing equipped with more LEDs and impact resistant polymer. We ALSO packed in two new state of the art technologies SSS™ and SVT™.

**THE POWER**

Get durability, runtime, and power to complete the toughest extrications. The M28 Lithium-Ion Battery Pack is built to handle high-torque applications. Managed by Milwaukee's exclusive REDLINK Intelligence, the battery features overload protection to prevent you from damaging your cordless power tools in heavy-duty situations, while the discharge protection prevents cell damage. The temperature management system and individual cell monitoring help maximize battery life.

All controls are indicated by distinctive red color for easy location and use.

Rear Facing LED lighting illuminates the working area.

**SVT™**

Higher speed thanks to a new, even more efficient drive system. Smart Valve Technology (SVT) senses pressure variations to ensure maxium tool performance.

360° rotating and folding handle made from glass fiber reinforced plastic helps minimize storage space requirements. This also protects the operator from electric shock up to 1,000 Volts.

**SSS™**

The Smart Swap System allows EFORCE battery tools to be converted to conventional hydraulic tools and vice versa.

WWW.GENESISRESCUE.COM

THE NEXT GENERATION OF EXTRICATION

## NEW SMART SWAP SYSTEM ALLOWS MORE FLEXIBILITY

Genesis Rescue's new generation of hose-bound cutters, spreaders and combi tools can be converted to EFORCE battery-powered devices and vice versa at any time via a new Smart Swap System. This means more flexible decision-making. The conversion can only be done by a Genesis certified service technician.

Tools can be converted in a few steps:

SSS™
SMART SWAP SYSTEM

## MORE SPEED THROUGH SMART VALVE TECHNOLOGY

Smart valve technology senses pressure variations that are needed to complete the task.

**EFORCE** rescue tools start in the volume stage and transition into the pressure stage. The volume stage makes tools move quickly and the pressure stage is where all critical "WORK" of extrication is performed. This is where Smart Valve Technology out performs the competition. The SVT returns EFORCE tools to the volume stage instantly, allowing faster tool response and drastically decreasing rescue times.

SVT™
SMART VALVE TECHNOLOGY

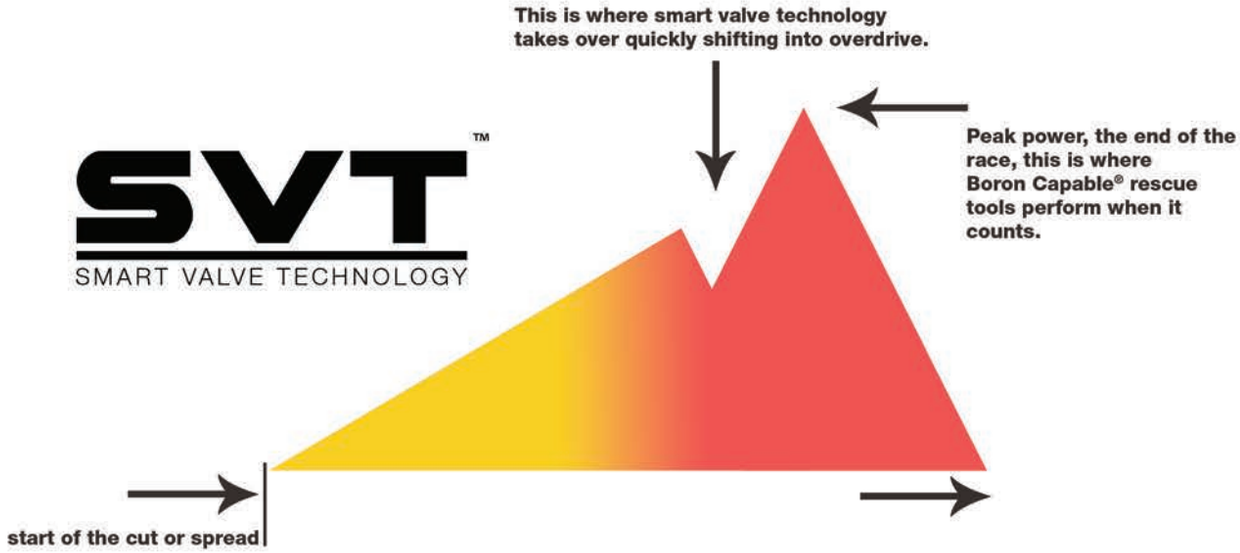

Lifetime Warranty

## C195-SL3 NXTGEN
### Part Number: ART.109.351.2

| | | |
|---|---|---|
| **Length (mm/in)** | 898 | 35.4 |
| **Width (mm/in)** | 236 | 9.3 |
| **Height (mm/in)** | 241 | 9.5 |
| **Weight (kg/lbs) w/battery** | 20.6 | 45.4 |
| **Cutting Opening (mm/in)** | 185 | 7.3 |
| **Ingress Protection Rating** | IP54 | IP54 |
| **NFPA Cut Rating** | A8-B9-C7-D9-E9-F4 | A8-B9-C7-D9-E9-F4 |
| **Nominal Pressure (bar/psi)** | 700 | 10,000 |

Lifetime Warranty

## C236-SL3 NXTGEN
### Part Number: ART.109.351.4

| | | |
|---|---|---|
| **Length (mm/in)** | 994 | 39.1 |
| **Width (mm/in)** | 260 | 10.2 |
| **Height (mm/in)** | 241 | 9.5 |
| **Weight (kg/lbs) w/battery** | 23.5 | 51.8 |
| **Cutting Opening (mm/in)** | 210 | 8.3 |
| **Ingress Protection Rating** | IP54 | IP54 |
| **NFPA Cut Rating** | A8-B9-C8-D9-E9-F4 | A8-B9-C8-D9-E9-F4 |
| **Nominal Pressure (bar/psi)** | 700 | 10,000 |

EFORCE

Lifetime Warranty

## C236-SL3 EFORCE

**Part Number: ART.109.351.4S**

| | | |
|---|---|---|
| **Length (mm/in)** | 982 | 38.7 |
| **Width (mm/in)** | 260 | 10.2 |
| **Height (mm/in)** | 241 | 9.5 |
| **Weight (kg/lbs) w/battery** | 23.5 | 51.8 |
| **Cutting Opening (mm/in)** | 210 | 8.3 |
| **Ingress Protection Rating** | IP54 | IP54 |
| **NFPA Cut Rating** | A8-B9-C8-D9-E9-F4 | A8-B9-C8-D9-E9-F4 |
| **Nominal Pressure (bar/psi)** | 700 | 10,000 |

EFORCE

Lifetime Warranty

## All-9 EFORCE

**Part Number: ART.109.351.0**

| | | |
|---|---|---|
| **Length (mm/in)** | 1029 | 40.5 |
| **Width (mm/in)** | 298 | 11.7 |
| **Height (mm/in)** | 241 | 9.5 |
| **Weight (kg/lbs) w/battery** | 26.3 | 58.0 |
| **Cutting Opening (mm/in)** | 265 | 10.4 |
| **Ingress Protection Rating** | IP54 | IP54 |
| **NFPA Cut Rating** | A9-B9-C9-D9-E9-F5 | A9-B9-C9-D9-E9-F5 |
| **Nominal Pressure (bar/psi)** | 700 | 10,000 |

*Images and Specifications are subject to change without notice*

**Lifetime Warranty**

**Genesis Advantage:**
Energy Efficient
Lightest EFORCE cutter available

Voltage: 28V
Amp Hours: 5 Ah
Watt Hours: 140 Wh

Warranty: Lifetime

# C165-SL3 EFORCE

## Part Number: ART.109.856.5

| | | |
|---|---|---|
| **Length (mm/in)** | 878 | 34.6 |
| **Width (mm/in)** | 236 | 9.3 |
| **Height (mm/in)** | 241 | 9.5 |
| **Weight (kg/lbs) w/battery** | 20.1 | 44.3 |
| **Cutting Opening (mm/in)** | 165 | 6.5 |
| **Ingress Protection Rating** | IP54 | IP54 |
| **NFPA Cut Rating** | A8-B5-C6-D6-E8-F3 | A8-B5-C6-D6-E8-F3 |
| **Nominal Pressure (bar/psi)** | 700 | 10,000 |

**Compatible Systems:**
SVT
SST
Extrication Backpack
Genesis 28v 5Ah Battery
EPACK 15 Ah
110v Tether Adapter

Lifetime Warranty

**Genesis Advantage:**
Energy Efficient
Best cost to power ratio

Voltage: 28V
Amp Hours: 5 Ah
Watt Hours: 140 Wh

Warranty: Lifetime

# C365-SL3 EFORCE

## Part Number: ART.109.636.3

| | | |
|---|---|---|
| **Length (mm/in)** | 981 | 38.6 |
| **Width (mm/in)** | 298 | 11.7 |
| **Height (mm/in)** | 241 | 9.5 |
| **Weight (kg/lbs) w/battery** | 25.8 | 56.9 |
| **Cutting Opening (mm/in)** | 170 | 6.7 |
| **Ingress Protection Rating** | IP54 | IP54 |
| **NFPA Cut Rating** | A8-B9-C8-D9-E9-F5 | A8-B9-C8-D9-E9-F5 |
| **Nominal Pressure (bar/psi)** | 700 | 10,000 |

**Compatible Systems:**
SVT
SST
Extrication Backpack
Genesis 28v 5Ah Battery
EPACK 15 Ah
110v Tether Adapter

*Images and Specifications are subject to change without notice*

EFORCE

Lifetime Warranty

## 11C-SL3 EFORCE

### Part Number: ART.109.351.5

| | | |
|---|---|---|
| **Length (mm/in)** | 811 | 31.9 |
| **Width (mm/in)** | 192 | 7.6 |
| **Height (mm/in)** | 241 | 9.5 |
| **Weight (kg/lbs) w/battery** | 13.6 | 30.0 |
| **Cutting Opening (mm/in)** | 221 | 8.7 |
| **Spreading Width (mm/in)** | 270 | 10.6 |
| **Pulling Distance (mm/in)** | 352 | 13.9 |
| **Ingress Protection Rating** | IP54 | IP54 |
| **Highest Spreading Force (kN/lbf)** | 32 | 7,200 |
| **Lowest Spreading Force (kN/lbf)** | 24 | 5,400 |
| **Highest Pulling Force (kN/lbf)** | 45 | 10,125 |
| **Lowest Pulling Force (kN/lbf)** | 34 | 7,650 |
| **NFPA Cut Rating** | A6-B7-C6-D7-E7-F3 | A6-B7-C6-D7-E7-F3 |
| **Nominal Pressure (bar/psi)** | 700 | 10,000 |

EFORCE

Lifetime Warranty

## 14C-SL3 EFORCE

### Part Number: ART.109.664.7

| | | |
|---|---|---|
| **Length (mm/in)** | 927 | 36.5 |
| **Width (mm/in)** | 236 | 9.3 |
| **Height (mm/in)** | 241 | 9.5 |
| **Weight (kg/lbs) w/battery** | 18.1 | 39.9 |
| **Cutting Opening (mm/in)** | 285 | 11.2 |
| **Spreading Width (mm/in)** | 360 | 14.2 |
| **Pulling Distance (mm/in)** | 380 | 15.0 |
| **Ingress Protection Rating** | IP54 | IP54 |
| **Highest Spreading Force (kN/lbf)** | 40 | 9,000 |
| **Lowest Spreading Force (kN/lbf)** | 28 | 6,300 |
| **Highest Pulling Force (kN/lbf)** | 56 | 12,600 |
| **Lowest Pulling Force (kN/lbf)** | 39 | 8,775 |
| **NFPA Cut Rating** | A7-B8-C7-D9-E8-F5 | A7-B8-C7-D9-E8-F5 |
| **Nominal Pressure (bar/psi)** | 700 | 10,000 |

EFORCE

Lifetime Warranty

## 15C-SL3 EFORCE

### Part Number: ART.109.664.9

| | | |
|---|---|---|
| **Length (mm/in)** | 933 | 36.7 |
| **Width (mm/in)** | 236 | 9.3 |
| **Height (mm/in)** | 241 | 9.5 |
| **Weight (kg/lbs) w/battery** | 19.2 | 42.3 |
| **Cutting Opening (mm/in)** | 295 | 11.6 |
| **Spreading Width (mm/in)** | 370 | 14.6 |
| **Pulling Distance (mm/in)** | 360 | 14.2 |
| **Ingress Protection Rating** | IP54 | IP54 |
| **Highest Spreading Force (kN/lbf)** | 39 | 8,775 |
| **Lowest Spreading Force (kN/lbf)** | 28 | 6,300 |
| **Highest Pulling Force (kN/lbf)** | 54 | 12,150 |
| **Lowest Pulling Force (kN/lbf)** | 39 | 8,775 |
| **NFPA Cut Rating** | A7-B8-C7-D8-E8-F5 | A7-B8-C7-D8-E8-F5 |
| **Nominal Pressure (bar/psi)** | 700 | 10,000 |

EFORCE

Lifetime Warranty

## 17C-SL3 EFORCE

### Part Number: ART.109.261.1

| | | |
|---|---|---|
| **Length (mm/in)** | 969 | 38.1 |
| **Width (mm/in)** | 236 | 9.3 |
| **Height (mm/in)** | 241 | 9.5 |
| **Weight (kg/lbs)** | 21 | 46.3 |
| **Cutting Opening (mm/in)** | 342 | 13.5 |
| **Spreading Width (mm/in)** | 405 | 15.9 |
| **Pulling Distance (mm/in)** | 406 | 16.0 |
| **Ingress Protection Rating** | IP54 | IP54 |
| **Highest Spreading Force (kN/lbf)** | 40 | 9,000 |
| **Lowest Spreading Force (kN/lbf)** | 29 | 6,525 |
| **Highest Pulling Force (kN/lbf)** | 57 | 12,825 |
| **Lowest Pulling Force (kN/lbf)** | 36 | 8,100 |
| **NFPA Cut Rating** | A7-B9-C7-D9-E9-F6 | A7-B9-C7-D9-E9-F6 |
| **Nominal Pressure (bar/psi)** | 700 | 10,000 |

*Images and Specifications are subject to change without notice*

EFORCE

Lifetime Warranty

## 11C-RIT3 EFORCE

### Part Number: ART.109.337.7

| | | |
|---|---|---|
| **Length (mm/in)** | 824 | 32.4 |
| **Width (mm/in)** | 192 | 7.6 |
| **Height (mm/in)** | 241 | 9.5 |
| **Weight (kg/lbs) w/battery** | 14.9 | 32.8 |
| **Cutting Opening (mm/in)** | 215 | 8.5 |
| **Spreading Width (mm/in)** | 285 | 11.2 |
| **Pulling Distance (mm/in)** | 276 | 10.9 |
| **Ingress Protection Rating** | IP54 | IP54 |
| **Highest Spreading Force (kN/lbf)** | 30 | 6,750 |
| **Lowest Spreading Force (kN/lbf)** | 26 | 5,850 |
| **Highest Pulling Force (kN/lbf)** | 41 | 9,225 |
| **Lowest Pulling Force (kN/lbf)** | 35 | 7,875 |
| **NFPA Cut Rating** | A6-B7-C6-D7-E7-F3 | A6-B7-C6-D7-E7-F3 |
| **Nominal Pressure (bar/psi)** | 700 | 10,000 |

EFORCE

Lifetime Warranty

## S44-SL3 EFORCE

### Part Number: ART.109.370.3

| | | |
|---|---|---|
| **Length (mm/in)** | 877 | 34.5 |
| **Width (mm/in)** | 239 | 9.4 |
| **Height (mm/in)** | 241 | 9.5 |
| **Weight (kg/lbs)** | 17.3 | 38.1 |
| **Spreading Width (mm/in)** | 610 | 24.0 |
| **Pulling Distance (mm/in)** | 388 | 15.3 |
| **Ingress Protection Rating** | IP54 | IP54 |
| **Highest Spreading Force (kN/lbf)** | 52 | 11,700 |
| **Lowest Spreading Force (kN/lbf)** | 41 | 9,225 |
| **Highest Pulling Force (kN/lbf)** | 42 | 9,450 |
| **Lowest Pulling Force (kN/lbf)** | 21 | 4,725 |
| **Nominal Pressure (bar/psi)** | 700 | 10,000 |

EFORCE

Lifetime Warranty

## S49-SL3 EFORCE
### Part Number: ART.109.173.6

| | | |
|---|---|---|
| **Length (mm/in)** | 982 | 38.7 |
| **Width (mm/in)** | 282 | 11.1 |
| **Height (mm/in)** | 241 | 9.5 |
| **Weight (kg/lbs)** | 20.7 | 45.6 |
| **Spreading Width (mm/in)** | 735 | 28.9 |
| **Pulling Distance (mm/in)** | 558 | 22.0 |
| **Ingress Protection Rating** | IP54 | IP54 |
| **Highest Spreading Force (kN/lbf)** | 76 | 17,100 |
| **Lowest Spreading Force (kN/lbf)** | 51 | 11,475 |
| **Highest Pulling Force (kN/lbf)** | 54 | 12,150 |
| **Lowest Pulling Force (kN/lbf)** | 30 | 6,750 |
| **Nominal Pressure (bar/psi)** | 700 | 10,000 |

EFORCE

Lifetime Warranty

## S54-SL3 EFORCE
### Part Number: ART.109.173.5

| | | |
|---|---|---|
| **Length (mm/in)** | 1015 | 40.0 |
| **Width (mm/in)** | 282 | 11.1 |
| **Height (mm/in)** | 241 | 9.5 |
| **Weight (kg/lbs)** | 20.9 | 46.1 |
| **Spreading Width (mm/in)** | 805 | 31.7 |
| **Pulling Distance (mm/in)** | 618 | 24.3 |
| **Ingress Protection Rating** | IP54 | IP54 |
| **Highest Spreading Force (kN/lbf)** | 68 | 15,300 |
| **Lowest Spreading Force (kN/lbf)** | 46 | 10,350 |
| **Highest Pulling Force (kN/lbf)** | 52 | 11,700 |
| **Lowest Pulling Force (kN/lbf)** | 26 | 5,850 |
| **Nominal Pressure (bar/psi)** | 700 | 10,000 |

*Images and Specifications are subject to change without notice*

EFORCE

Lifetime Warranty

## 31” Ram EFORCE
### Part Number: ART.031.901.2

| | | |
|---|---|---|
| **Length (mm/in) length closed** | 553 | 21.8 |
| **Width (mm/in)** | 142 | 5.6 |
| **Height (mm/in)** | 347 | 13.7 |
| **Weight (kg/lbs) with battery** | 18.2 | 40.1 |
| **Stroke (mm/in)** | 287 | 11.3 |
| **Length Extended (mm/in)** | 840 | 33.1 |
| **Ingress Protection Rating** | IP54 | IP54 |
| **Pulling Force (kN/lbf)** | 47 | 10,575 |
| **Spreading Force (kN/lbf)** | 142 | 31,950 |
| **Nominal Pressure (bar/psi)** | 700 | 10,000 |

EFORCE

Lifetime Warranty

## 41” Ram EFORCE
### Part Number: ART.041.901.2

| | | |
|---|---|---|
| **Length (mm/in) length closed** | 653 | 25.7 |
| **Width (mm/in)** | 142 | 5.6 |
| **Height (mm/in)** | 380 | 15.0 |
| **Weight (kg/lbs) with battery** | 21.6 | 47.6 |
| **Stroke (mm/in)** | 408 | 16.1 |
| **Length Extended (mm/in)** | 1061 | 41.8 |
| **Ingress Protection Rating** | IP54 | IP54 |
| **Pulling Force (kN/lbf)** | 46 | 10,350 |
| **Spreading Force (kN/lbf)** | 138 | 31,050 |
| **Nominal Pressure (bar/psi)** | 700 | 10,000 |

EFORCE

Lifetime Warranty

## 21-36 Ram EFORCE

**Part Number: ART.107.527.2**

| | | |
|---|---|---|
| **Length (mm/in) length closed** | 542 | 21.3 |
| **Width (mm/in)** | 134 | 5.3 |
| **Height (mm/in)** | 325 | 12.8 |
| **Weight (kg/lbs) with battery** | 15.7 | 34.6 |
| **Stroke (mm/in)** | 370 | 14.6 |
| **Length Extended (mm/in)** | 910 | 35.8 |
| **Ingress Protection Rating** | IP54 | IP54 |
| **Spreading Force (kN/lbf)** | 111.3 | 25,043 |
| **Nominal Pressure (bar/psi)** | 700 | 10,150 |

EFORCE

Lifetime Warranty

## 22-54 Ram EFORCE

**Part Number: ART.107.834.2**

| | | |
|---|---|---|
| **Length (mm/in) length closed** | 586 | 23.1 |
| **Width (mm/in)** | 134 | 5.3 |
| **Height (mm/in)** | 349 | 13.7 |
| **Weight (kg/lbs) with battery** | 20.1 | 44.3 |
| **Stroke Stage 1 (mm/in)** | 428 | 16.9 |
| **Stroke Stage 2 (mm/in)** | 372 | 14.6 |
| **Length Extended (mm/in)** | 1386 | 54.6 |
| **Ingress Protection Rating** | IP54 | IP54 |
| **Force Stage 1 (kN/lbf)** | 108 | 24,300 |
| **Force Stage 2 (kN/lbf)** | 62 | 13,950 |
| **Nominal Pressure (bar/psi)** | 550 | 7,975 |

*Images and Specifications are subject to change without notice*

## 28V Milwaukee Battery
**Part Number: ART.105.375.5**

| | | |
|---|---|---|
| **Length (mm/in)** | 84 | 3.3 |
| **Width (mm/in)** | 81 | 3.2 |
| **Height (mm/in)** | 134 | 5.3 |
| **Weight (kg/lbs)** | 1 | 2.3 |

**Compatible Systems:**
All EFORCE tools
ETORCH

Voltage: 28V
Amp Hours: 5 Ah
Watt Hours: 140 Wh

Warranty: 3 year

## 28V EPACK 15AH
**Part Number: ART.110.100.0Y**

| | | |
|---|---|---|
| **Length (mm/in)** | 258 | 10.2 |
| **Width (mm/in)** | 195 | 7.7 |
| **Height (mm/in)** | 112 | 4.4 |
| **Weight (kg/lbs)** | 5 | 10.9 |

**Compatible Systems:**
All EFORCE tools
ETORCH

Cord Length (mm/in): 4572 / 180

Voltage: 28V
Amp Hours: 15 Ah
Watt Hours: 388 Wh

Warranty: 2 year

## 28V GENESIS BATTERY
**Part Number: ART.107.289.3**

| | | |
|---|---|---|
| **Length (mm/in)** | 83.8 | 3.3 |
| **Width (mm/in)** | 81.3 | 3.2 |
| **Height (mm/in)** | 134.6 | 5.3 |
| **Weight (kg/lbs)** | 1.5 | 3.2 |

**Compatible Systems:**
All EFORCE tools
ETORCH

Voltage: 28V
Amp Hours: 5 Ah
Watt Hours: 140 Wh

Warranty: 3 year

## 1-BAY CHARGER
### Part Number: ART.105.410.9

| | | |
|---|---|---|
| **Length (mm/in)** | 304 | 12 |
| **Width (mm/in)** | 222 | 8.75 |
| **Height (mm/in)** | 127 | 5 |
| | | |

**Compatible Systems:**

5 Ah Milwaukee 28v battery
3 Ah Milwaukee 28v battery
28v Genesis Battery

Warranty: 5 years

## 3-BAY CHARGER
### Part Number: ART.105.410.9

| | | |
|---|---|---|
| **Length (mm/in)** | 464 | 18.3 |
| **Width (mm/in)** | 241 | 9.5 |
| **Height (mm/in)** | 144 | 5.6 |
| **Weight (kg/lbs)** | 5.3 | 11.7 |

**Compatible Systems:**

5 Ah Milwaukee 28v battery
3 Ah Milwaukee 28v battery
28v Genesis Battery

Warranty: 5 years

## TETHERING ADAPTER
### Part Number: ART.105.410.9

| | | |
|---|---|---|
| **Cord Length (mm/in)** | 3,657 | 144 |
| **Voltage / Hertz** | 120V | 50-60 Hz |
| **Amps / Watts** | 8 | 920 |
| **Weight (kg/lbs)** | 5 | 11 |

**Compatible Systems:**

The tethering adapter is compatible all the tools in the Genesis EFORCE line of tools. EPACK

Warranty: 2 years

*Images and Specifications are subject to change without notice*

## ETORCH LED LIGHT
### Part Number: ART.550.100.0

| | | |
|---|---|---|
| **Length with battery (mm/in)** | 241 | 9.5 |
| **Width (mm/in)** | 101 | 4 |
| **Height (mm/in)** | 147 | 5.8 |
| **Weight (kg/lbs)** | 2.3 | 5 |

**Compatible Systems:**
Milwaukee 28V 5Ah Battery
Milwaukee 28V 3 Ah Battery
28V Genesis Battery
EPACK

Voltage: 28V

Warranty: Lifetime

## ANGLE V-HEAD
### THREADED: ART.011.130.2
### SLIP FIT: ART.011.130.4

| | | |
|---|---|---|
| **Length (mm/in)** | 95 | 3.8 |
| **Width (mm/in)** | 75 | 2.9 |
| **Height (mm/in)** | 75 | 2.9 |
| **Weight (kg/lbs)** | 268 | 5 |

**Compatible Systems:**

**Threaded & Slip Fit:**
21/36 EFORCE Ram
31 Inch Push-Pull Ram
41 Inch Push-Pull Ram

**Slip Fit (Ram base only):**
22/54 EFORCE Telescopic Ram

Warranty: Lifetime

## EFORCE RAM KIT
### Part Number: ART.011.520.5

| | | |
|---|---|---|
| **Length (mm/in)** | 381 | 15 |
| **Width (mm/in)** | 114 | 4.5 |
| **Height (mm/in)** | 267 | 10.5 |
| **Weight (kg/lbs)** | 4.8 | 10.6 |

**Compatible Systems:**
21/36 EFORCE Ram
**EFORCE Ram Kit Contents:**
Angle V-head (Threaded)
Angle V-head (Slip Fit)
1 Extension (Multiple options)
O-Ring Kit
**Fits your choice of extension:**
7 inch | 10 inch | 12 inch

Warranty: Lifetime

## 7” Ram Extensions
### Part Number: ART.105.410.9

| | | |
|---|---|---|
| **Length (mm/in)** | 175 | 6.9 |
| **Weight (kg/lbs)** | 2 | 4.4 |
| | | |
| | | |

**Compatible Systems:**

21/36 EFORCE Ram
22/54 EFORCE Telescopic Ram

**Advantage:**
Forged construction, secure lock pin

Warranty: Lifetime

## 10” Ram Extension
### Part Number: ART.383.857.9

| | | |
|---|---|---|
| **Length (mm/in)** | 250 | 9.8 |
| **Weight (kg/lbs)** | 2.6 | 5.7 |
| | | |
| | | |

**Compatible Systems:**

21/36 EFORCE Ram
22/54 EFORCE Telescopic Ram

**Advantage:**
Forged construction, secure lock pin

Warranty: Lifetime

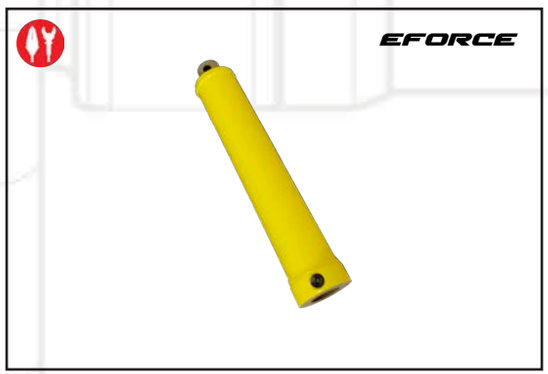


## 12” Ram Extension
### Part Number: ART.106.244.2

| | | |
|---|---|---|
| **Length (mm/in)** | 320 | 12.6 |
| **Weight (kg/lbs)** | 3 | 6.6 |
| | | |
| | | |

**Compatible Systems:**

21/36 EFORCE Ram
22/54 EFORCE Telescopic Ram

**Advantage:**
Forged construction, secure lock pin

Warranty: Lifetime

*Images and Specifications are subject to change without notice*

## RIT Tip
### Part Number: ART.109.685.9

| | | |
|---|---|---|
| **Length (mm/in)** | 124.5 | 4.9 |
| **Width (mm/in)** | 89 | 3.5 |
| **Height (mm/in)** | 50.8 | 2 |
| **Weight Per Tip (kg/lbs)** | 0.9 | 2.2 |

**Compatible Tools:**
11C-RIT3
15C-SL3
17C-SL3

**Advantage:**
The RIT tip was designed with breaching in mind offering a large surface area for maximum bite.

Warranty: Lifetime

## Brute Tip
### Part Number: ART.386.732.3

| | | |
|---|---|---|
| **Length (mm/in)** | 129.5 | 5.1 |
| **Width (mm/in)** | 43.2 | 1.7 |
| **Height (mm/in)** | 58.4 | 2.3 |
| **Weight Per Tip (kg/lbs)** | 0.8 | 1.75 |

**Compatible Tools:**
11C-RIT3
15C-SL3
17C-SL3

**Advantage:**
Genesis' strongest tip for brute force operation like spreading, pealing, and moving steel.

Warranty: Lifetime

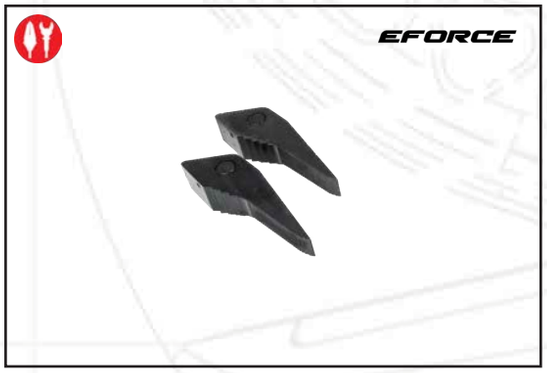


## Tip Extension
### Part Number: ART.105.189.6

| | | |
|---|---|---|
| **Length (mm/in)** | 182.9 | 7.2 |
| **Width (mm/in)** | 35.6 | 1.4 |
| **Height (mm/in)** | 61 | 2.4 |
| **Weight Per Tip (kg/lbs)** | 1.2 | 2.55 |

**Compatible Tools:**
11C-RIT3
15C-SL3
17C-SL3

**Advantage:**
This mid range tip extension offers our users a little more throw as the situation requires.

Warranty: Lifetime

## Deluxe Slip Fit Kit
### Part Number: ART.011.520.1

| | |
|---|---|
| **Angled V-Head - 1** | **Spanner Wrench - 1** |
| **X-Head - 1** | **Pulling Shackles and Pins** |
| **10 inch Extension - 1** | **Pulling Adapters** |
| **6 Inch Extension - 1** | **3 Inch Slip Fit Extension** |

**Compatible Tools:**
31 Inch Push-Pull Ram
41 Inch Push-Pull Ram

**Advantage:**
With use of the patented Genesis V-Head there is no need for additional equipment when performing dash related evolutions.

Warranty: Lifetime

## Mechanical Ram
### Part Number: ART.105.647.8

| | | |
|---|---|---|
| **Min-Max Length (mm/in)** | 308-650 | 21.1-25.6 |
| **Width (mm/in)** | 68 | 2.7 |
| **Weight (kg/lbs)** | 6 | 13.2 |
| | | |

**Compatible Tools:**
11C-SL3
14C-SL3

**Advantage:**
A combination tool now has the ability to be a true multi-tool. Cut, Spread, and now a pushing ram.

Warranty: Lifetime

## EXTRICATION BACKPACK
### Part Number: ART.EXTBP

| | | |
|---|---|---|
| **Length (mm/in)** | 864 | 34 |
| **Width (mm/in)** | 304 | 12 |
| **Height (mm/in)** | 165 | 6.5 |
| **Weight (kg/lbs)** | 2.6 | 5.8 |

**Compatible Tools:**
The extrication backpack will fit all the tools in the Genesis EFORCE line of tools.

**Advantage:**
A collaboration with one of the worlds largest FD's this pack is designed with tactical rescue in mind. Comfort, Durability and functionality.

Warranty: 3 year

*Images and Specifications are subject to change without notice*

Lifetime Warranty

## Kodiak Deluxe Kit
### Part Number: ART.500.102.2

| | | |
|---|---|---|
| **Length (mm/in)** | 686 \| 27 - (Strut) | 864 \| 34 - (Kit) |
| **Width (mm/in)** | 203 \| 8 - (Strut) | 381 \| 15 - (Kit) |
| **Height (mm/in)** | 203 \| 8 - (Strut) | 254 \|10 - (Kit) |
| **Weight (kg/lbs)** | 4.8 \|10.5 - (Strut) | 32.7 \| 72 - (Kit) |

| Kodiak Deluxe Kit Contents | Quantity |
|---|---|
| 15 Inch Extension | 2 |
| 30 Inch Extension | 2 |
| Kodiak Strut with D-ring | 2 |
| Ratchet Straps with J-Hook | 4 |
| Kodiak Head | 2 |
| Carrying Bag | 1 |

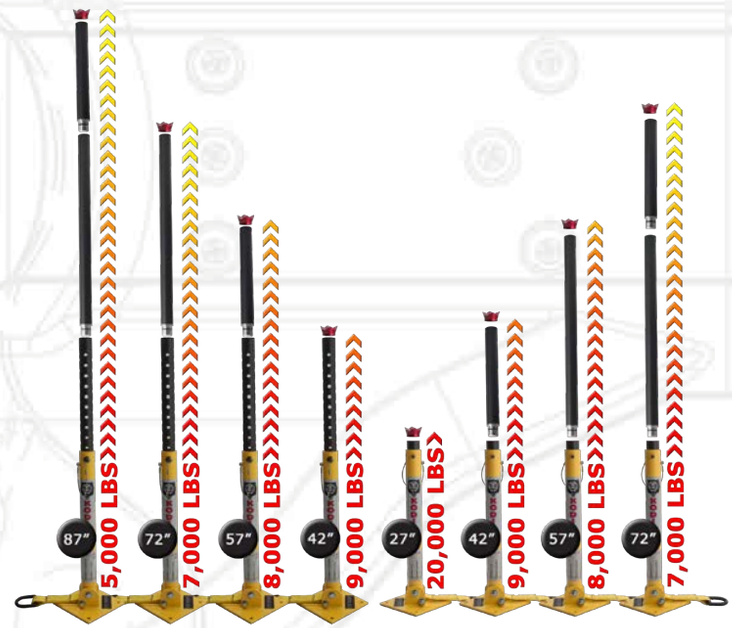


**Load Limits Per Extension Length**

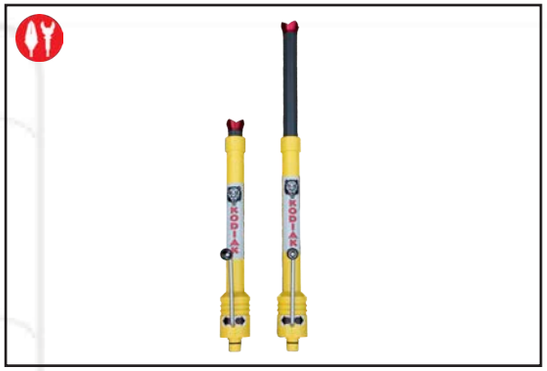

## Kodiak Lifting Device
### Part Number: ART.500.600.KLD

| | | |
|---|---|---|
| **Length Closed \| Length Open (mm/in)** | 775 \| 1130 | 30.5 \| 44.5 |
| **Width (mm/in)** | 200 | 8 |
| **Depth (mm/in)** | 4 | 10 |
| **Weight (kg/lbs)** | 15.5 | 7 |

**Compatible Tools:**
Standard Kodiak Kit
Kodiak Deluxe Kit
Kodiak Tri-Strut Kit

Lifting Capacity - 5,000 lbs | 2,267 kg

Warranty: Lifetime

## Standard Kodiak Kit
### Part Number: ART.500.100.1

| | | |
|---|---|---|
| **Length (mm/in)** | 686 \| 27 - (Strut) | 864 \| 34 - (Kit) |
| **Width (mm/in)** | 203 \| 8 - (Strut) | 381 \| 15 - (Kit) |
| **Height (mm/in)** | 203 \| 8 - (Strut) | 254 \| 10 - (Kit) |
| **Weight (kg/lbs)** | 4.8 \|10.5 - (Strut) | 26.3 \| 58 - (Kit) |

**Standard Kodiak Kit Contents:**
15 Inch Extension - Qty 2
30 Inch Extension - Qty 2
Kodiak w/Ratchet - Qty 2
J-Hook - Qty 2
Kodiak Head - Qty 2
Carry Bag - Qty 2

Warranty: Lifetime

## Kodiak Tri-Strut Kit
### Part Number: ART.500.103.3

| | | |
|---|---|---|
| **Length (mm/in)** | 686 \| 27 - (Strut) | 864 \| 34 - (Kit) |
| **Width (mm/in)** | 203 \| 8 - (Strut) | 381 \| 15 - (Kit) |
| **Height (mm/in)** | 203 \| 8 - (Strut) | 254 \| 10 - (Kit) |
| **Weight (kg/lbs)** | 4.8 \|10.5 - (Strut) | 45.8 \| 101 - (Kit) |

**Kodiak Tri-Strut Kit Contents:**
15 Inch Extension - Qty 3
30 Inch Extension - Qty 3
Kodiak w/D-Hook - Qty 3
Ratchet Straps - Qty 6
J-Hook - Qty 6
Kodiak Head - Qty 3
Carry Bag - Qty 2

Warranty: Lifetime

*Images and Specifications are subject to change without notice*

SUBMIT YOUR PHOTOS TO
INFO@GENESISRESCUE.COM
Photo credit: Box 120 Fire Photography

Photo credit: Box 120 Fire Photography

Photo credit: Box 120 Fire Photography

Photo credit: Box 120 Fire Photography

GENESIS
RESCUE SYSTEMS

**Genesis Rescue Systems**
2780 Culver Ave.
Kettering, Ohio 45429
info@genesisrescue.com
www.genesisrescue.com